

my-PV WiFi Meter

The guardian of the power flows of your PV system: everything goes smoothly.


3-phase power meter for my-PV devices

- Clamp-on current transducers for easiest measurement and high installation comfort
- Also for high power in commercial applications
- Wireless communication



Incl. 3 Clamp-on transducers

my-PV WiFi Meter

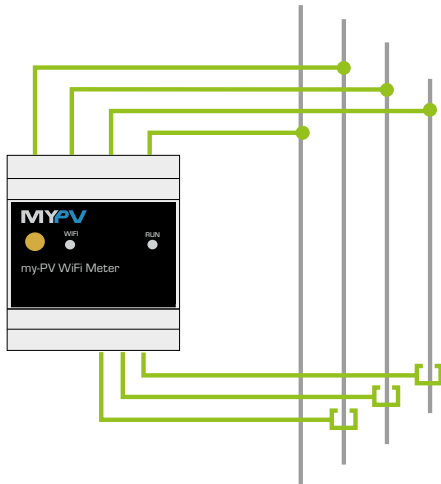

my-PV WiFi Meter maximize self-consumption of your PV system in the easiest way.

The my-PV WiFi Meter detects the energy flows of the photovoltaic system. my-PV devices receive desired information from our WiFi meter wirelessly. As a result, only energy that is currently available is used to generate heat. Power feed-in is avoided. **PV self-consumption is maximized, the public power grid is relieved.** The my-PV WiFi Meter is mounted in the distribution cabinet directly after the utility meter and detects the power flow via three external clamp-on current transducers.

TECHNICAL SPECIFICATIONS MY-PV WIFI METER

Measurement range	0 – 75 A (higher currents with other clamp-on sensors possible) 230 V AC ($\pm 10\%$)
Interface	WiFi
Dimensions (L x H x D)	90,2 x 71 x 57,5 mm
Type of protection	IP 51
Connections	Screw terminals
Max. terminal cross section	2,5 mm ² fine-wire
Terminal tightening torque	0,4 Nm
Terminal stripping length	6 – 7 mm
Weight	ca. 200 g
Mounting	35 mm DIN rail
Ambient temperature	-20 ... + 60 °C
Power supply	Via Ua/Ub/Uc

CLAMP-ON CURRENT TRANSDUCERS

Max. wire diameter	10 mm
Dimensions (L x H x D)	26,5 x 24 x 41 mm
Weight	3 x 80 g
Special sizes (W x H x L)	0-100 A Max. wire diameter 23 mm, 51 x 41 x 65 mm
	0-200 A Max. wire diameter 23 mm, 51 x 41 x 65 mm
	0-400 A Max. wire diameter 36 mm, 67 x 50 x 87 mm
	0-600 A Max. wire diameter 36 mm, 67 x 50 x 87 mm

my-PV GmbH

Betriebsstraße 12 • A-4523 Neuzeug
T: +43 (0)7259 / 393 28 • E: info@my-pv.com
www.my-pv.com

Subject to change
Photos and graphics: stock.adobe.com, my-PV