



Datasheet ValkAce - Strongline roof hook

Technical specifications

- Strong roof hook for PV systems installed on pitched roofs with tiles.
- 3-way adjustability in height and width
 - Top 38-51mm – adjustability of 13mm.
 - Bottom 176-189 – adjustability of 13mm.
 - Width minus and plus 50 mm.
- Dakhaken te gebruiken voor horizontale en verticale profielmontage (staand/liggend).
- Dakhaak gefabriceerd in RVS.
- Dakhaak koppeling gefabriceerd in staal met zink magnesium coating.


Key benefits ValkAce - Strongline roof hook

- High flexibility. Top, bottom and width can be adjusted for perfect outlining.
- Easy to use with ValkAce profiles and ValkAce panel clamps.

Article information

Material no.	747506
Description	ValkAce - Strongline roof hook
GTIN code	08719632527268
Image	
Weight (kg)	0,488
Pcs. per packaging	35

Dimensions (mm)

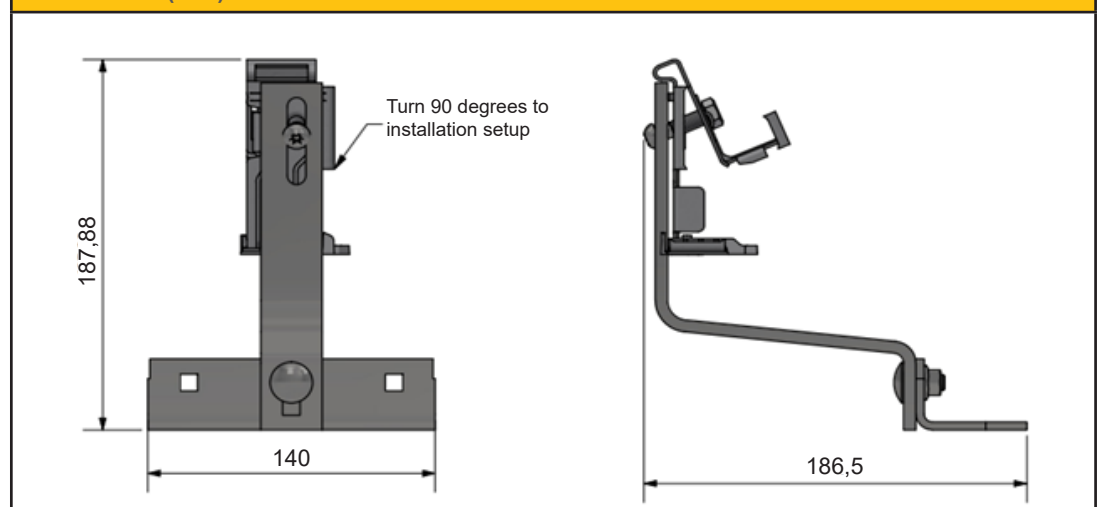




Datasheet ValkAce - Strongline roof hook


Profile horizontal (portrait) and vertical (landscape)

ValkAce profiel horizontale opstelling

ValkAce profiel verticale opstelling

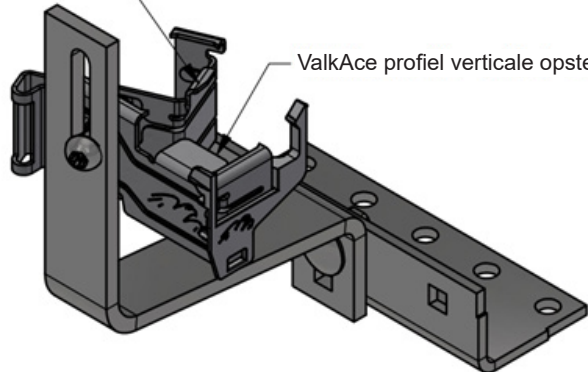

Adjustment options (mm)

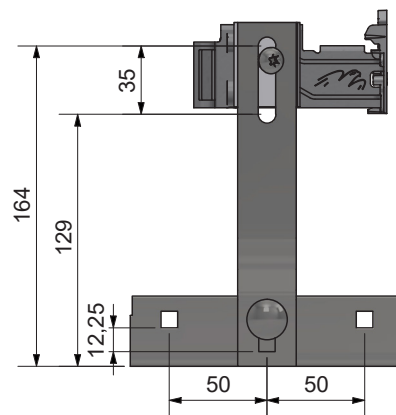

Technical specifications ValkAce

- Standard profile lengths ideal for panels 1134 mm wide.
- Suitable for 25 - 30 - 35 - 40 mm panel height.
- Space between panels 13 mm.

Key benefits ValkAce

- Easy clip-on panel clamps and slide-in coupling.
- Only one tool required (T30).
- Super-fast installation and easy height adjustment.
- Automatic electrical connection of metal parts and panels.
- Clip-on cable management and earth terminal.
- Very limited number of components for easy logistics and assembly.

Calculations

Projects using the ValkAce - Strongline roof hook can be calculated easily and according to regionally applicable standards using the [ValkPVplanner](#).