

# 455 W

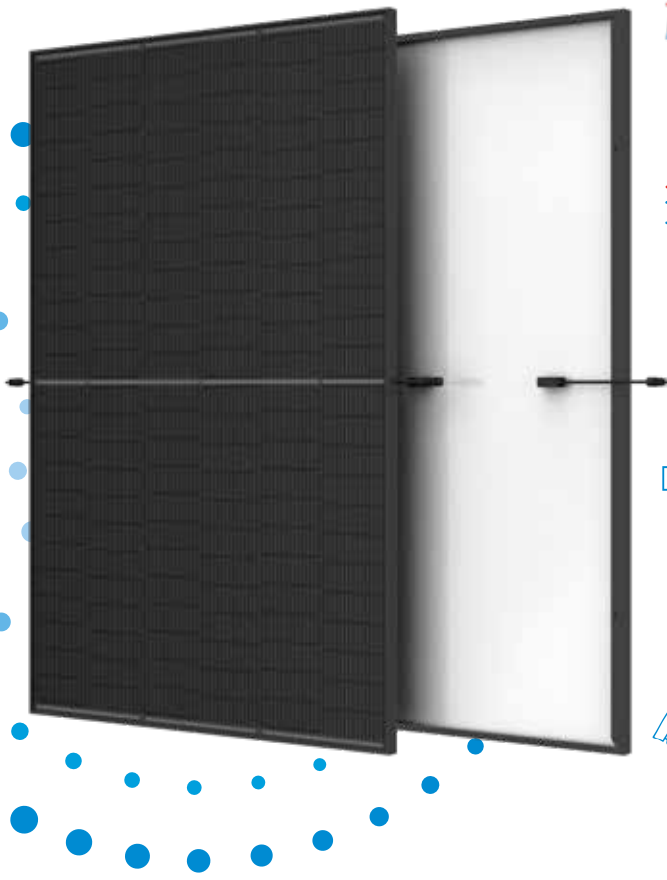
MAXIMUM POWER OUTPUT

# 0/+5 W

POSITIVE POWER TOLERANCE

# 22.8 %

MAXIMUM EFFICIENCY



### Outstanding Visual Appearance

- Designed with aesthetics in mind
- Inheriting Trina Solar awards-winning full black design



### Dual-glass Design, High Reliability

- Up to 25 years product warranty and 30 years power warranty
- Excellent fire rating and resistance to harsh environmental conditions
- 5,400 Pa snow load and 4,000 Pa wind load (test loads)



### Small in size, bigger on power

- Up to 455 W, 22.8 % module efficiency with high density interconnect technology
- Reduces installation cost with higher power bin and efficiency
- Boost performance in warm weather with low temperature coefficient and operating temperature



### Universal solution for residential and C&I rooftops

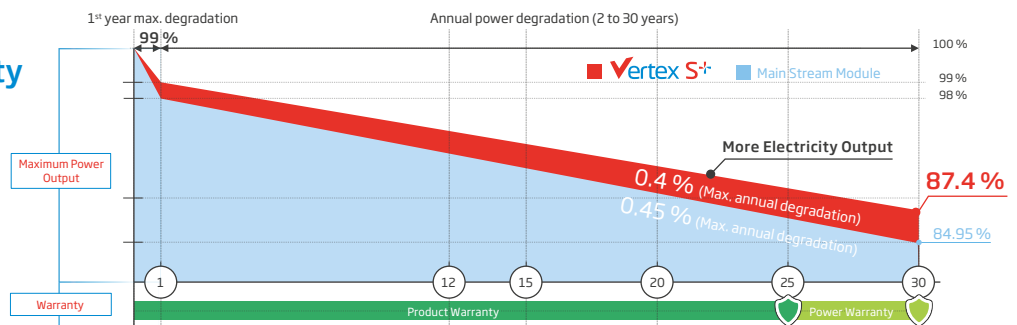
- Designed for compatibility with existing mainstream inverters, optimizers and mounting systems
- Perfect size and low weight for easy handling. Optimized transportation cost
- Flexible installation solutions for system deployment

## Extended Vertex S+ Warranty

**1 %**  
1<sup>st</sup> year max. degradation

**0.4 %**  
Max. annual degradation from year 2 to 30




**25 Years**  
Product Workmanship Warranty



## Comprehensive Products and System Certificates



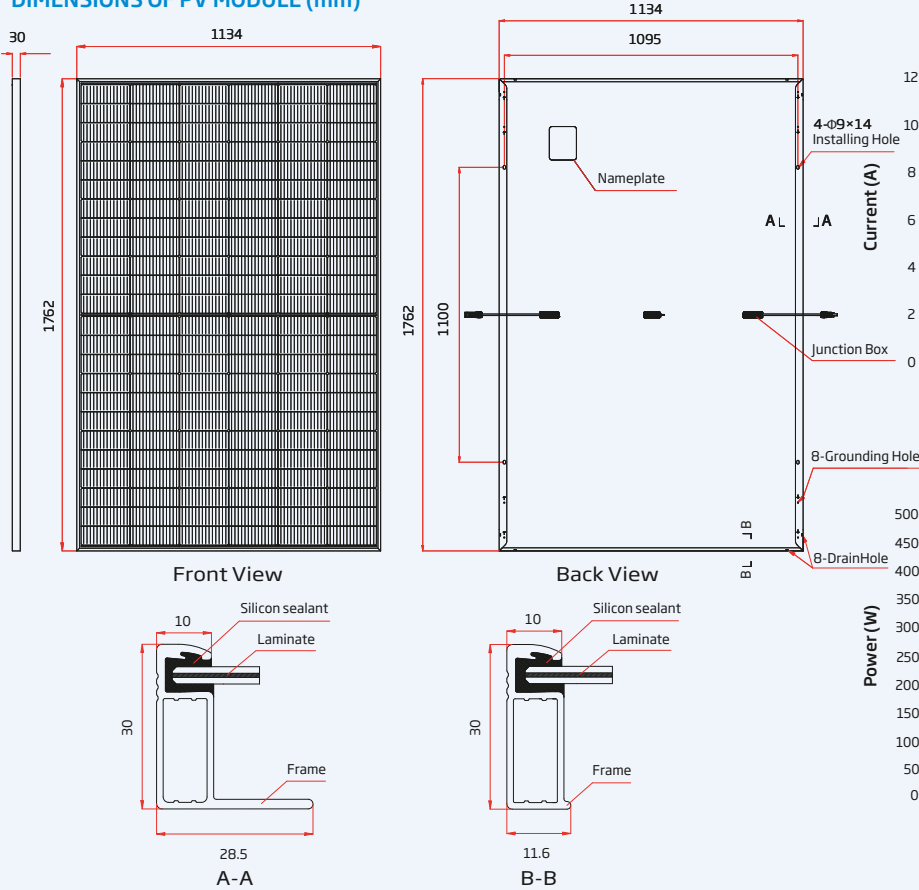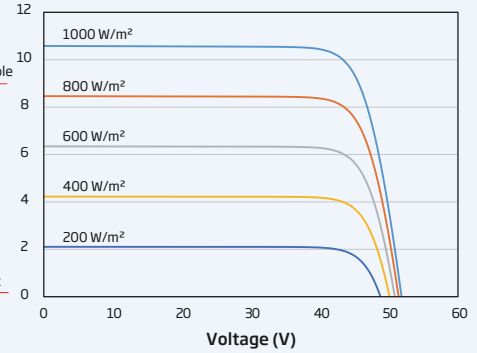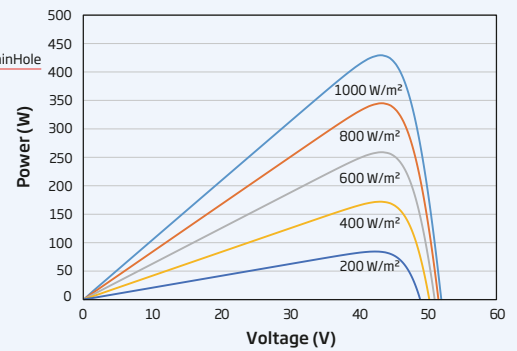IEC61215/IEC61730/IEC61701/IEC62716  
 ISO 9001: Quality Management System  
 ISO 14001: Environmental Management System  
 ISO14064: Greenhouse Gases Emissions Verification  
 ISO45001: Occupational Health and Safety Management System  
 ISO14025: Environmental Product Declaration

**DIMENSIONS OF PV MODULE (mm)**

**I-V CURVES OF PV MODULE (440 W)**

**P-V CURVES OF PV MODULE (440 W)**

**ELECTRICAL DATA (STC)**

	TSM-430 NEG9R.25	TSM-435 NEG9R.25	TSM-440 NEG9R.25	TSM-445 NEG9R.25	TSM-450 NEG9R.25	TSM-455 NEG9R.25
Peak Power Watts- $P_{MAX}$ (Wp)*	430	435	440	445	450	455
Power Tolerance- $P_{MAX}$ (W)**	0/+5					
Maximum Power Voltage- $V_{MPP}$ (V)	43.2	43.6	44.0	44.3	44.6	45.0
Maximum Power Current- $I_{MPP}$ (A)	9.96	9.99	10.01	10.05	10.09	10.11
Open Circuit Voltage- $V_{OC}$ (V)	51.4	51.8	52.2	52.6	52.9	53.4
Short Circuit Current- $I_{SC}$ (A)	10.59	10.64	10.67	10.71	10.74	10.77
Module Efficiency $\eta_m$ (%)	21.5	21.8	22.0	22.3	22.5	22.8

STC: Irradiance 1000 W/m<sup>2</sup>, Cell Temperature 25 °C, Air Mass AM 1.5. \*Measuring tolerance: ±3%. \*\* Power selection up to: +3%

**ELECTRICAL DATA (NOCT)**

	TSM-430 NEG9R.25	TSM-435 NEG9R.25	TSM-440 NEG9R.25	TSM-445 NEG9R.25	TSM-450 NEG9R.25	TSM-455 NEG9R.25
Maximum Power- $P_{MAX}$ (Wp)	329	333	337	341	344	348
Maximum Power Voltage- $V_{MPP}$ (V)	40.7	41.0	41.4	41.7	42.0	42.3
Maximum Power Current- $I_{MPP}$ (A)	8.08	8.12	8.14	8.17	8.19	8.22
Open Circuit Voltage- $V_{OC}$ (V)	48.7	49.1	49.5	49.9	50.2	50.6
Short Circuit Current- $I_{SC}$ (A)	8.54	8.58	8.60	8.63	8.66	8.68

NOCT: Irradiance at 800 W/m<sup>2</sup>, Ambient Temperature 20 °C, Wind Speed 1 m/s.

**MECHANICAL DATA**

Solar Cells	Monocrystalline
No. of cells	144 cells
Module Dimensions	1762×1134×30 mm
Weight	21.0 kg
Front Glass	1.6 mm, High Transmission, AR Coated Heat Strengthened Glass
Encapsulant material	POE/EVA
Back Glass	1.6 mm, Heat Strengthened Glass
Frame	30 mm Anodized Aluminium Alloy, Black
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0 mm <sup>2</sup> Landscape: 1100/1100 mm Portrait: 280/350 mm*
Connector	TS4/TS4 Plus/MC4 EVO2*

\*Special order only

**TEMPERATURE RATINGS**

NOCT (Nominal Operating Cell Temperature)	43 °C (±2 °C)
Temperature Coefficient of $P_{MAX}$	-0.29 %/°C
Temperature Coefficient of $V_{OC}$	-0.24 %/°C
Temperature Coefficient of $I_{SC}$	0.04 %/°C

**MAXIMUM RATINGS**

Operational Temperature	-40 to +85 °C
Maximum System Voltage	1500 V DC (IEC)
Max Series Fuse Rating	25 A

**WARRANTY**

25 year Product Workmanship Warranty  
30 year Power Warranty  
1% first year degradation  
0.4% Annual Power Attenuation

(Please refer to product warranty for details)

**PACKAGING CONFIGURATION**

Modules per box:	36 pieces
Modules per 40' container:	936 pieces