





MultiRail System

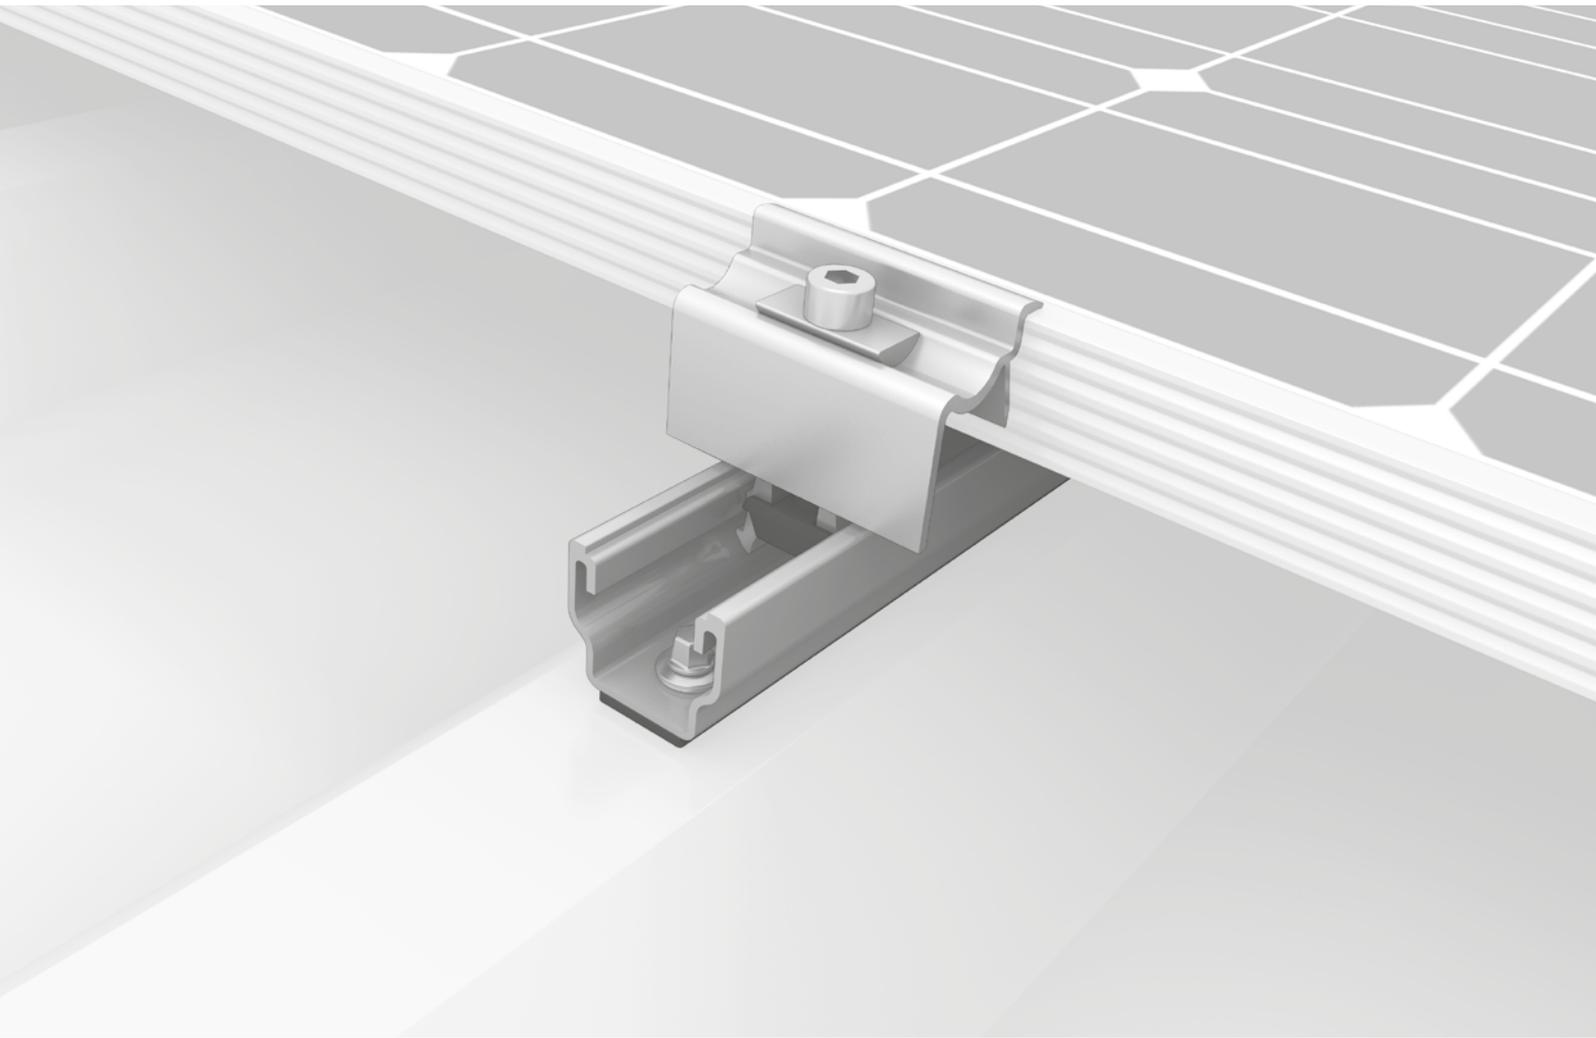

- / Easy and proven – as a short rail or a flexible component in various lengths
- / Quick planning with less material and greater effectiveness
- / Solid base rail for trapezoidal elevation S-Dome Small



Components



Self-tapping screws

With sealing washers



RailUp Set

- / Improves rear ventilation
- / Easier installation of micro inverters

MultiRail versions



MultiRail 10

- / Length 100 mm
- / Horizontal module orientation



MultiRail 25

- / Length 250 mm
- / For more flexibility and high load demands at horizontal module orientation



MultiRail 4.20

- / Length 4200 mm
- / Long rail for cutting to customised sizes
- / Without EPDM seal; to be fastened manually with adhesive

Technical data

	MultiRail 10, 25/4, 4.20
Scope of application	Pitched roofs, 5 - 75°, with trapezoidal sheet metal or sandwich panel
Fastening type / roof fixture	Fastened with self-tapping sheet screws
Requirements	<ul style="list-style-type: none"> • Sheet thickness: ≥ 0.4 mm steel or ≥ 0.5 mm aluminium • Sandwich panel: approval from manufacturer required • Crest width: at least 22 mm • Maximum crest width: independent of crest distance
Material	Aluminium [EN AW-6063 T66]; EPDM
W = width [mm]	39
H = height [mm]	35
L = rail length [mm]	<ul style="list-style-type: none"> • MultiRail 10: 100 • MultiRail 25/4: 250 • MultiRail 4.20: 4200
Second rail layer	SingleRail

