

Datasheet ValkAce - Slimline roof hook (adjustable)

Technical specifications

- Mounting system for pitched roofs with tiles by fixing behind the tile batten.
- Hooks can be used for horizontal and vertical profile mounting (portrait / landscape).
- Both standard roof hook (range 40-50 mm) and adjustable roof hook (range 35-59 mm) available.
- Roof hook manufactured in high-quality aluminium.
- Roof hook coupling manufactured in steel with zinc magnesium coating.


Key benefits ValkAce - Slimline roof hook (adjustable)

- Extra-strong roof hook due to clever design.
- Possibility of height adjustment of profiles up to 32.5 mm.
- Easy to use with ValkAce profiles and ValkAce panel clamps.

Article information

Material no.	729505	729501
Description	ValkAce - Slimline roof hook	ValkAce - Slimline roof hook - adjustable
GTIN code	08719632527237	08719632527220
Image		
Weight (kg)	0,298	0,371
Pcs. per packaging	30	30


Dimensions ValkAce – Slimline roof hook (mm)

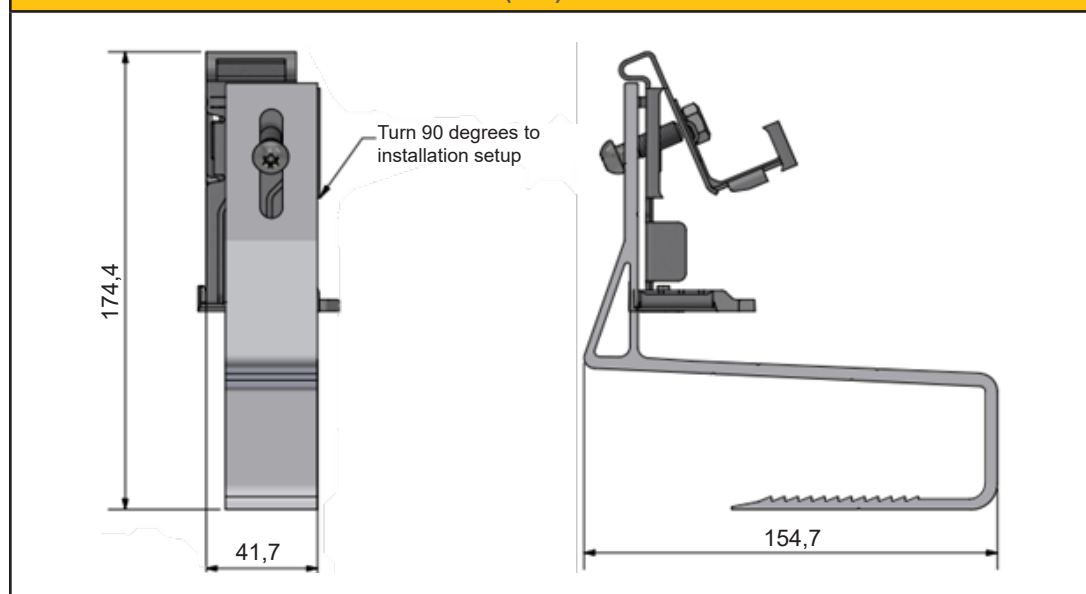




Datasheet ValkAce - Slimline roof hook (adjustable)

Dimensions ValkAce – Slimline roof hook - adjustable (mm)

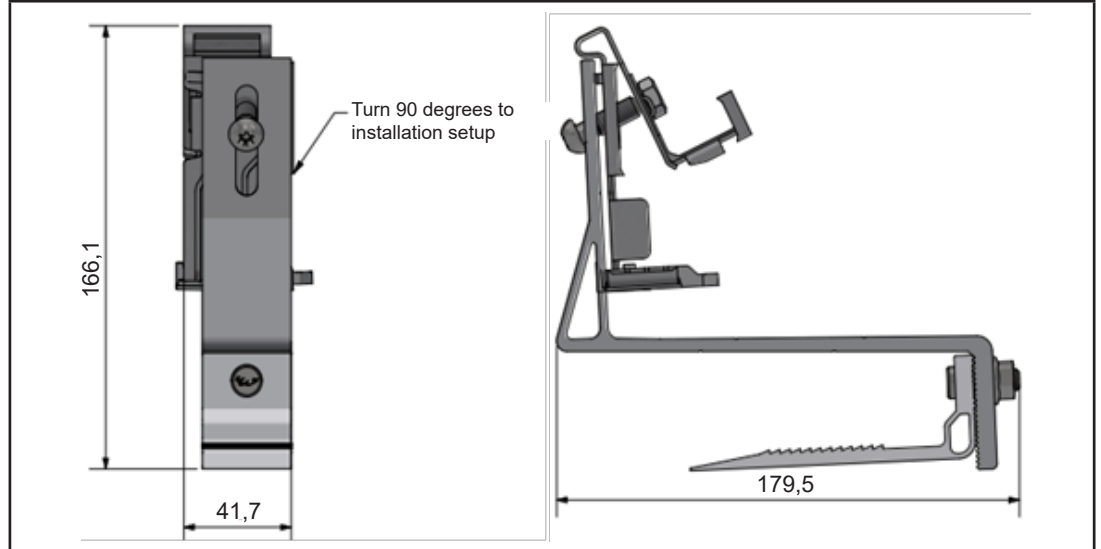

Profile horizontal (portrait) and vertical (landscape)

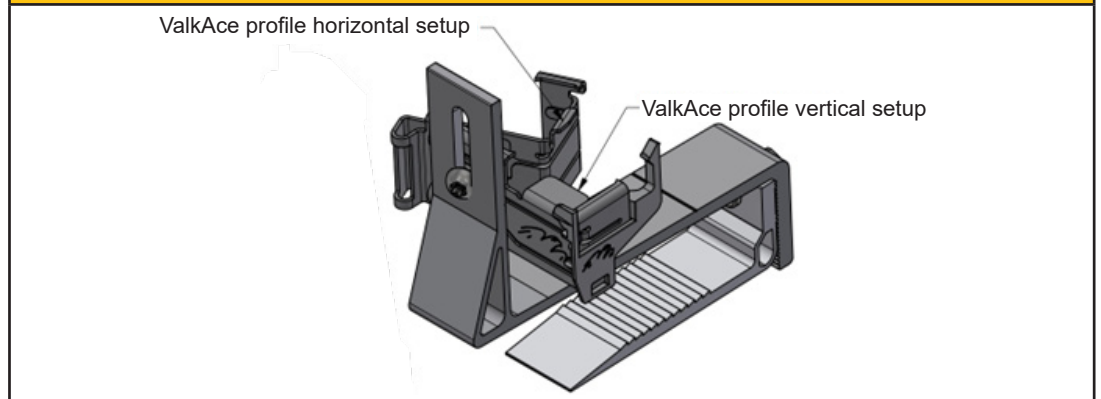

Technical specifications ValkAce

- Standard profile lengths ideal for panels 1134 mm wide.
- Suitable for 25 - 30 - 35 - 40 mm panel height.
- Space between panels 13 mm.

Key benefits ValkAce

- Easy clip-on panel clamps and slide-in coupling.
- Only one tool required (T30).
- Super-fast installation and easy height adjustment.
- Automatic electrical connection of metal parts and panels.
- Clip-on cable management and earth terminal.
- Very limited number of components for easy logistics and assembly.

Calculations

Projects using the ValkAce - Slimline roof hook (adjustable) can be calculated easily and according to regionally applicable standards using the [ValkPVplanner](#).