



Datasheet ValkAce - Strongline Heavy Duty roof hook

Technical specifications

- Very strong roof hook for PV systems installed on pitched roofs with tiles.
- Roof hooks to be used for horizontal and vertical profile mounting (portrait / landscape).
- Roof hook manufactured in galvanised steel.
- Roof hook coupling manufactured in steel with zinc magnesium coating.


Key benefits ValkAce - Strongline Heavy Duty roof hook

- Very suitable for use in areas with very high snow and/or wind loads.
- Possibility of height adjustment of profiles up to 32.5 mm.
- Easy to use with ValkAce profiles and ValkAce panel clamps.
- Roof hook easy to fit using plastic shims (article 739004).

Article information


Material no.	747504
Description	ValkAce - Strongline Heavy Duty roof hook
GTIN code	08719632527251
Image	
Weight (kg)	0,881
Pcs. per packaging	20

Dimensions (mm)

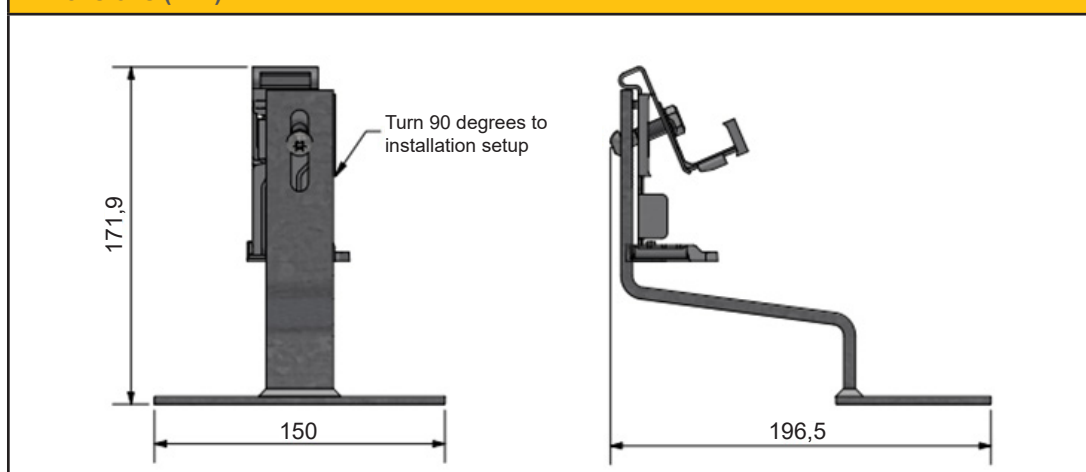



Datasheet ValkAce - Strongline Heavy Duty roof hook

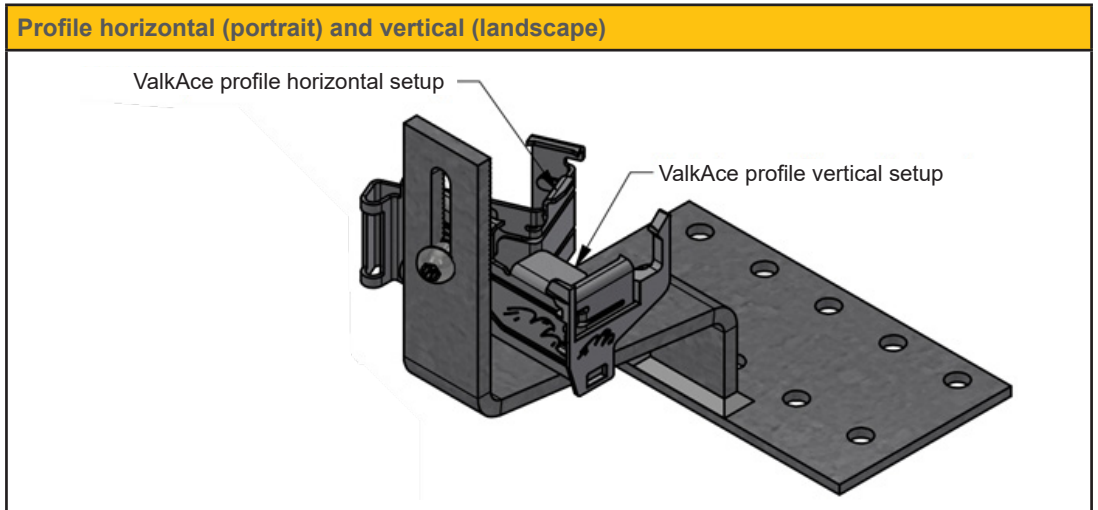

Technical specifications ValkAce

- Standard profile lengths ideal for panels 1134 mm wide.
- Suitable for 25 - 30 - 35 - 40 mm panel height.
- Space between panels 13 mm.

Key benefits ValkAce

- Easy clip-on panel clamps and slide-in coupling.
- Only one tool required (T30).
- Super-fast installation and easy height adjustment.
- Automatic electrical connection of metal parts and panels.
- Clip-on cable management and earth terminal.
- Very limited number of components for easy logistics and assembly.

Calculations

Projects using the ValkAce - Strongline Heavy Duty roof hook can be calculated easily and according to regionally applicable standards using the [ValkPVplanner](#).